

# SC750™ & SC800™ Available with EcoFlex™ System

## Walk-Behind Scrubbers




### Simple operation, flexible performance.

Advance's rugged, low-maintenance SC750™ and SC800™ scrubbers deliver incredible value on a walk-behind platform. High productivity per tankful allows for 84 minutes of continuous scrubbing, which reduces dump/refill cycles and helps provide fast ROI. The optional EcoFlex™ System offers the flexibility to clean across the entire cleaning spectrum from green to clean. At the touch of a button one can switch from chemical free cleaning to using an ultra low dilution ratio, and of course detergent can be used at full strength for the toughest of soils. The burst of power feature lets you easily apply more pressure, more solution and more detergent at the touch of a single button. With the flexibility to easily apply the right scrubbing performance for the job, you'll use less detergent, minimize water use and save on cleaning costs.

### Maintain a flexible routine. EcoFlex™ System

- Green
- Clean
- Cost-efficient

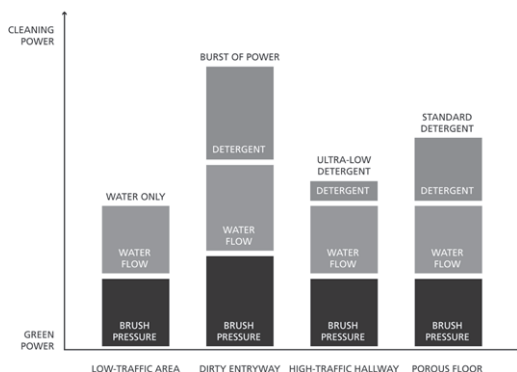

### Standard Features Include

- Smart Solutions or EcoFlex™ on all machines
- Green cleaning and high productivity technology
- SC750 with 21 gallon (80 L) solution and recovery tanks
- SC800 with 25 gallon (95 L) solution and recovery tanks
- Self adjusting skirt on disc machines
- Heavy duty scrubbing performance

### Typical Applications Include

- Routine scrubbing
- Ultra-light to heavy scrubbing
- Entryway cleaning
- Spill cleanup
- Grease removal
- Grout and porous-surface cleaning
- Detergent residue removal (using water only)

ecoflex™ system

# SC750™ & SC800™ Available with EcoFlex™ System

## Walk-Behind Scrubbers



A built-in squeegee hanger makes transport easier and reduces trip and fall accidents.



An integrated debris catch cage traps and collects drain clogging debris.



The ST 26 inch disc model – provides simple operation and robust scrubbing controls.

- 1 Soft-Touch™ paddle system provides superior comfort and safe operation
- 2 Very-quiet 61 dB A sound level allows for daytime cleaning
- 3 High capacity solution/recovery tanks SC750 21 gal (80 L) SC800 25 gal (95 L) offer high productivity through fewer dump/refill cycles
- 4 A choice of an onboard charger or shelf charger provides convenient charging options
- 5 Gray, non-marking solid tires deliver superior traction
- 6 A self-adjusting splash skirt provides safety against splashing and reduces slip and fall accidents
- 7 Disc brushes can be clicked off with the touch of a button



## Defining Cleaning Innovation...

- Our products are designed using innovative technology that increases productivity and drives down the cost to clean.
- You can get expert service and maintenance for your Advance machines from factory-trained personnel around the world. Fast parts delivery, too.
- Maintain peak performance with Nilfisk Parts.

## Technical Specifications

Models	SC750 26D / SC750 ST 26D	SC750 28D	SC750 28C	SC800 34D / SC800 ST 34D
<b>Scrub System</b>				
Scrub Head Type	Disc	Disc	Cylindrical	Disc
Scrub Path	26 in (66 cm)	28 in (71 cm)	28 in (71 cm)	34 in (86 cm)
Productivity				
Theoretical Max. @ 3.4 mph (5.5 kph)	38,900 ft <sup>2</sup> /hr (3,600 m <sup>2</sup> /hr)	41,900 ft <sup>2</sup> /hr (3,890 m <sup>2</sup> /hr)	41,900 ft <sup>2</sup> /hr (3,890 m <sup>2</sup> /hr)	50,900 ft <sup>2</sup> /hr (4,730 m <sup>2</sup> /hr)
Est. Coverage @ 2.3 mph (3.7 kph)	26,300 ft <sup>2</sup> /hr (2,400 m <sup>2</sup> /hr)	28,366 ft <sup>2</sup> /hr (2,635 m <sup>2</sup> /hr)	28,366 ft <sup>2</sup> /hr (2,635 m <sup>2</sup> /hr)	34,400 ft <sup>2</sup> /hr (3,180 m <sup>2</sup> /hr)
Brush Pad/Driver Assembly	(2) 13 in (33 cm)	(2) 14 in (35.5 cm)	(2) 27 in (68.6 cm)	(2) 17 in (43.0 cm)
Scrub Pressure				
Regular Scrub	80 lb (36.3 kg)	80 lb (36.3 kg)	80 lb (36.3 kg)	80 lb (36.3 kg)
Extreme Scrub	170 lb (77.1 kg)	170 lb (77.1 kg)	–	170 lb (77.1 kg)
Scrub Disc/Brush Speed	270 rpm	270 rpm	840 rpm	270 rpm
Onboard Detergent	EcoFlex™ Optional (N/A on ST Models)			
Solution Flow Rate/Operating Time				
Low	0.25 gal/min (0.98 L/min) - 91 minutes		0.25 gal/min (0.98 L/min) - 101 minutes	
Medium	0.50 gal/min (1.93 L/min) - 42 minutes		0.50 gal/min (1.93 L/min) - 54 minutes	
High	0.65 gal/min (2.46 L/min) - 32 minutes		0.65 gal/min (2.46 L/min) - 40 minutes	
Solution Tank	21 gal (80 L)	21 gal (80 L)	21 gal (80 L)	25 gal (95 L)
Solution Control	Gravity feed with pulsating solenoid technology and liquid level sensing			
Standard Models	Gravity feed with pulsating solenoid technology			
ST Models	Gravity feed with pulsating solenoid technology			
<b>Recovery System</b>				
Recovery Tank	21 gal (80 L)	21 gal (80 L)	21 gal (80 L)	25 gal (95 L)
Vacuum Fan				
Motor	0.66 hp (490 W)			
Stages	3-Stage			
Waterlift	51.2 in (130 cm)			
<b>Propulsion and Power System</b>				
Speed Control	Standard Models - Safety paddle system infinity variable with maximum speed limiter settings			
Standard Models	ST Models - ON/OFF palm switches with maximum speed limiter settings			
Propel Speed				
Transport	3.6 mph (5.8 km/hr)			
Scrubbing	3.4 mph (5.5 km/hr)			
Gradeability				
Scrubbing & Transport - (Full)	8.5° / 14.9%			
Trailer Ramp (Empty)	10.0° / 17.6%			
Batteries (24 V System)	(4) 6 V batteries: 242 Ah Wet or 310 Ah Wet or 312 Ah maintenance-free (AGM)			
Battery Charger				
Standard Models	24 Volt Shelf or Onboard Charger			
ST Models	Shelf Charger Only			
Drive Wheels	(2) 10 in (25.4 cm) diameter solid, gray - non-marking polyurethane			
<b>Dimensions / Weight / Sound</b>				
Length Standard Model	58.4 in (148 cm)	59.9 in (152 cm)	58.5 in (149 cm)	63.3 in (161 cm)
Length ST Model	56.6 in (144 cm)	58.1 in (148 cm)	56.8 in (144 cm)	61.5 in (156 cm)
Width Without Squeegee	28.8 in (73 cm)	30.8 in (78 cm)	30.8 in (78 cm)	36.8 in (93 cm)
Width With Squeegee	35.5 (90 cm)	35.5 (90 cm)	35.5 (90 cm)	41.5 in (105 cm)
Height Standard Model	45.1 in (115 cm)	45.1 in (115 cm)	45.1 in (115 cm)	45.1 in (115 cm)
Height ST Model	44.5 in (113 cm)	44.5 in (113 cm)	44.5 in (113 cm)	44.5 in (113 cm)
Max Dry Weight Without Batteries	347 lb (158 kg)	347 lb (158 kg)	347 lb (158 kg)	375 lb (170 kg)
Max Dry Weight Including Std. Batteries	615 lb (280 kg)	615 lb (280 kg)	615 lb (280 kg)	643 lb (292 kg)
Minimum Aisle Turn	62 in (1.57 m)	62 in (1.57 m)	65 in (1.65 m)	65 in (1.65 m)
Sound Level (IEC 60704-1)	61 dB (A) @ Operators position			

Specifications are subject to change without notice.



### Nilfisk, Inc.

9435 Winnetka Avenue North  
Brooklyn Park, MN 55445  
www.advance-us.com  
Phone 800-850-5559  
Fax 800-989-6566

240 Superior Boulevard  
Mississauga, Ontario, Canada L5T 2L2  
www.nilfisk-advance.ca  
Phone 800-668-8400  
Fax 800-263-5111

