

PROUDLY BUILT IN THE USA

FACTORY CAT

GTX SERIES

Rider Scrubbers
24" - 34"



WALK BEHINDS



SWEEPERS



HIGH PERFORMANCE



CONCRETE POLISHING



These tough, compact scrubbers offer the productivity of riders with better maneuverability than walk-behinds. With two specialized cleaning systems to choose from, **FACTORY CATS** offer the performance and capacity required to clean your unique application.

The "Disk" machines offer gimbaled brush drive and 50% more scrubbing power than competitive brands. The "Cylindricals" scrub and sweep in a single pass. The scrub deck has curtains and wipers, for unmatched water control. The side shrouds are made of thick steel and remove easily for brush access and adjustments.

Productivity is a function of scrub width, run time and tank capacity, and **FACTORY CATS** top the chart.

- | | |
|------------------------|--------------------------------|
| 1. Larger tanks | = Less stopping to refill |
| 2. Wider scrub path | = Fewer trips down the aisle |
| 3. High scrub pressure | = Less double scrubbing |
| 4. More vacuum | = Dry, safe, clean floors |
| 5. Big battery pack | = Runs a full shift (7 hours!) |

Every manufacturer claims to have equipment that is tough and easy to clean up. **FACTORY CAT GTXs** have "Tip Back Tanks" for unrestricted access.

The operator sits in a spring-suspensioned, fully adjustable, mid-back chair. The adjustable steering column, headlight, and armrests further enhance operator comfort.

The **FACTORY CATS** have a powerful drive motor, can climb steep ramps, and come standard with heavy duty tires. Features include an automatic parking brake, and reduction of transport speed while scrubbing or reversing.

Our *Central Command II* system includes a LCD readout, on-board diagnostics, and three hour meters, simplifying preventive maintenance intervals.

FACTORY CATS use powerful motors, so they typically run at only 75% of their capacity. This leaves power in reserve for times where heavy scrubbing is required, and prolongs motor life.

FACTORY CATS are constructed of thick steel, use stainless fasteners and powder painted to prevent corrosion. The tanks have extra-thick walls, brass inserts, and "through tubes" for strength.

We invite you to compare other equipment. Your maintenance staff will notice the difference.



**Call (800) 634-4060
to schedule a FREE
Demonstration**

TANK TIPS BACK



Easy Access to:

- Filters
- Valves
- Vacuum
- Batteries
- Actuator




CLEANS UP GREASE



Oversized Lid
Permits Cleaning

Vacuum Screen
Foam Protection


MAINTENANCE SCREEN

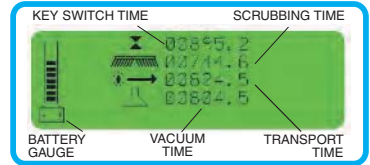

Drain Saver
Keeps Debris Out of Drains

Tall Seat and Armrests
Operator Comfort

OPERATING SCREEN

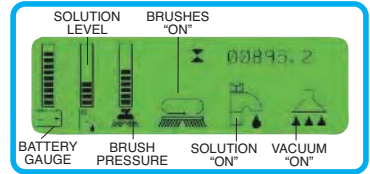

Adjustable Steering
Operator Comfort

Rollers (6" Tall)
Protect Walls

Food Guard
Protects Operator's Feet

Heavy Duty Drive
Climbs Ramps

Self Adjusting Wipers
Water Control on Turns

Steel Bumper
Squeegee Protection

36 Volt System
Runs Full Shift

Vacuum Muffler
Quiet Operation

Wide Tires (5")
Good Traction and Soft Footprint

Disk Deck
Oversized Motors

SHORTER THAN WALK BEHINDS

54" LONG

56" LONG

MANEUVERABLE

U-TURNS IN 57"

POPULAR OPTIONS

Strobe Light

Spray Hose

Remote Vac Wand

Onboard Soap

Exhaust Diffuser

Side Brooms

Heavy Duty Doors

Non-Marking Tires

GTX RIDER
U-TURNS IN 57"

MAGNUM

RETURN ON INVESTMENT

AREA Sq. Ft.	TIME REQUIRED TO CLEAN		
	By Hand	Model GTX 30"	Weekly Savings
10,000	7 hrs	0.5 hrs	\$ 252.00
25,000	17 hrs	1.0 hrs	\$ 636.00
75,000	50 hrs	2.5 hrs	\$1,900.00
100,000	70 hrs	3.5 hrs	\$2,544.00

SOLD THROUGH DISTRIBUTORS

We've built our reputation by providing the toughest, best-engineered, highest-value machines our industry can produce. We make sure that in every market in which our more than 350 distributors in 40 countries and service centers do business, they maintain a "factory" trained service department with a vested interest in our customers long-term satisfaction.

Factory Cat offers a line of cleaning equipment that includes sweepers and scrubbers, in both walk-behind and ride on models. All our models are practical, rugged machines that are sensibly priced. Your local dealer will be happy to assist you with rentals, soap, and floor sealer information. They will gladly provide service on all brands of cleaning equipment.

AUTHORIZED DISTRIBUTOR



Manufactured By:
R.P.S. Corporation
P.O. Box 368
Racine, Wisconsin 53401
Phone: (800) 634-4060
International: 011 262 681 5747
Fax: (866) 901-3335
www.factorycat.com



Copyright R.P.S. Corporation 2012. All rights reserved. Since our policy is one of constant improvement, all specifications are subject to change without notice or penalty.

Body Construction/Dimensions

Tank Material:	Poly (3/8") (1 cm)
Chassis Construction:	3/16" Steel (0.5 cm)
Rear Wheels:	(2) 12" x 5" (31 x 13 cm)
Size (L x W x H):	54" x 26" x 55" (137 x 66 x 140 cm)
Squeegee Size:	32" or 35" (81 or 89 cm)
Weight:	780 lbs. (354 kg)
Weight (w/245 ah batteries):	1,222 lbs. (555 kg)

Scrub System

Disk Brush/Pad Diameter:	GTX-26: (2) 13" [(2) 33 cm] GTX-30: (2) 15" [(2) 38 cm] GTX-34: (2) 17" [(2) 43 cm]
Standard Brush Motor (disk):	(2) 0.75 hp / 300 rpm (560 watts)
Optional Brush Motor (disk):	(2) 1.0 hp / 350 rpm (746 watts)
Cylindrical Brush Size:	GTX-24: (2) 22" x 5.5" GTX-27: (2) 25" x 5.5" GTX-30: (2) 28" x 5.5" GTX-34: (2) 32" x 5.5"
Standard Brush Motor (cylindrical):	(2) 0.75 hp / 350 rpm
Cylindrical Brush Speed	750 rpm
Brush Down Pressure:	0-250 lbs. (0-115 kg)
Actuator Rating:	500 lbs. (230 kg)

Battery System

System Voltage:	36 volts
Standard Battery Rating:	245 AH
Optional Battery Rating:	325 AH
Battery Run Time:	Up to 7 hrs.
Charger (110-v / 60 Hz, auto):	36-v / 25 amp

Solution System

Solution Tank Capacity:	35 gal. (133 liters)
Solution Flow Rate:	0-1.5 gpm (0-6 lpm)
Solution Filter:	Stainless Inline

Recovery System

Recovery Tank Capacity:	35 gal. (133 liters)
Vacuum Power (standard):	1.0 hp (746 watts)
Drain Hose:	2.0" Diameter
Vacuum Specs (water-lift / airflow)	68" / 70 cfm
Demisting Chamber:	1.25 gallons (5 liters)

Drive System

Transaxle Description:	1.0 hp, sealed (746 watt)
Speed Control:	0-230 ft/min 4 mph (6 kph)
Minimum Aisle U-Turn:	56" (142 cm)
Sound Level:	68 dBA

Productivity

Cleaning Width & Rate/Hour:	24"/26,400 sq. ft./hr. (8,048 m²/hr)
	26"/28,600 sq. ft./hr. (8,720 m²/hr)
	27"/29,700 sq. ft./hr. (9,055 m²/hr)
	30"/33,000 sq. ft./hr. (10,061 m²/hr)
	34"/37,400 sq. ft./hr. (11,402 m²/hr)

Optional Equipment

- Maintenance Free Batteries
- Spray Hose / Vacuum Wand
- Manager "Lockout"
- Onboard Soap
- Concrete / Marble Polishing
- Onboard Charger
- Grey Tires
- Remote Scrub Wand
- Side Brooms
- HD Package